

# Loadrite H2250

## Haul Truck Monitor



### Automate all your haul truck productivity data

The Loadrite® H2250 provides near real-time reporting of haul truck production and process monitoring, driving increased production and limiting costs. Equip operators with powerful tools to optimize every load, and fleet managers with real-time data so they can respond quickly and with deeper insight.

All your haul truck productivity data is automated with the H2250, saving you time and frustration from tabulating load sheets, and replacing it with accurate production figures presented in clear graphical electronic reports. The H2250 provides complete tracking/auditing of material movements from the dig site to the dump zone. No more manual counting of each cycle, now everyone has accurate, real-time information in the cab, on a web browser and on mobile devices.


### Features

- Near real-time visibility of haul operations.
- Accurate and detailed automatic data collection, not reliant on operators.
- Mixed-fleet support to centralize production data in one location.
- Reporting suite to analyze the data, find inefficiencies, under-utilization and bottlenecks and improve processes.
- Improve haul safety with driver alerts and reporting.
- Reduce waste from:
  - Under and over-loading
  - Truck queuing (line-ups)
  - Slow or inconsistent cycle times
  - Truck rollover
  - Excessive tire wear

## Additional features

### Higher production


- Take control of your payload variance, with accurate loadout. Prevent overloading, and reduce underloading, to optimize every truck and maximize total production by increasing tons per shift.

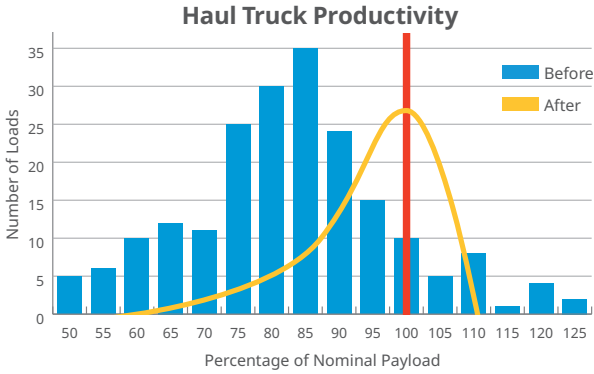

### Speed reports


- Log truck speed to identify speeding events and slow sections of haul roads. Rank and pinpoint locations on a map to make it easy to manage truck speed issues.

## Optional Accessories & Integrations

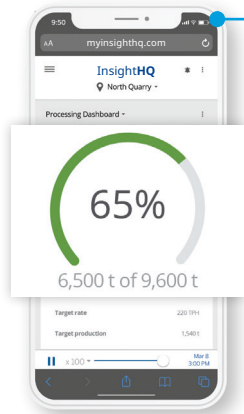

### InsightHQ

See all of your load and haul productivity data at a glance. Compare operators and check that your haul fleet is meeting plant demand, adjusting to changes in cycle time or that product ratios are meeting targets. Loading efficiency data with an average load and hauling time is also available to view.

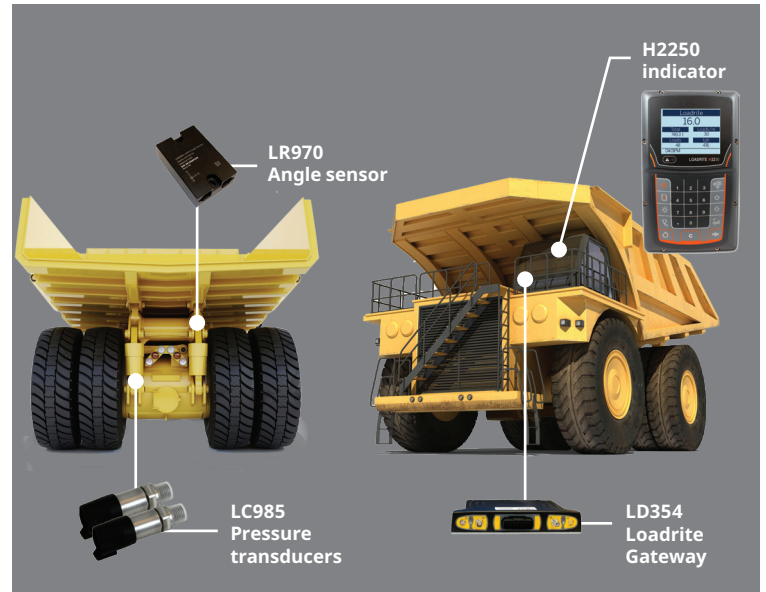

## Specifications

### Power Requirements

Supply voltage ..... 12 or 32 V DC  
 Current consumption ..... 350 mA typical at 24 V DC  
 950 mA max.  
 4 A max. with LP950 printer  
 Power supply protection ..... Automotive power supply transient  
 suppression exceeds SAE specifications for  
 DC automotive power supply transients

### Physical Specifications

Indicator weight ..... 1.5 kg (3.3 lbs)  
 Indicator dimensions ..... W145 x L240 x D110 mm (5.7 x 9.4 x 4.3 in)  
 Indicator operating temperature ..... -10°C to 50°C (14°F to 122°F)  
 Environmental protection ..... IP67 protected pressure transducers, IP67  
 protected angle sensors, IP54 protection for indicator

### Other Information

- Supported languages:** English, French, German, Br. Portuguese, Spanish
- Warranty:** 1 year parts and labor

Contact your local dealer today

BRISBANE	TOWNSVILLE	SYDNEY	SYDNEY - WASTE
U4, 29 Links Avenue North Eagle Farm QLD 4009 P: 1800 655 860 M: 0499 990 093 Reception.QLD@SmartTech.com.au	11-13 Casey Street Townsville QLD 4814 P: 1800 655 860 M: 0499 990 093 Reception.QLD@SmartTech.com.au	U13, 7-9 Progress Circuit Prestons NSW 2170 P: 1800 655 860 M: 0408 964 134 Reception.NSW@SmartTech.com.au	Unit 33 A/13 Endeavour Rd Caringbah NSW 2229 P: 1800 655 860 M: 0418 244 995 Waste@SmartTech.com.au
MELBOURNE	ALBURY/WODONGA	TASMANIA	PERTH
118 The Crossway Campbellfield VIC 3061 P: 1800 655 860 M: 0427 786 125 Reception.VIC@SmartTech.com.au	408/4 Wagga Road Lavinton NSW 2641 P: 1800 655 860 M: 0459 965 187 Reception.NSW@SmartTech.com.au	PO Box 315 Newstead TAS 7250 P: 1800 655 860 M: 0427 766 125 Reception.TAS@SmartTech.com.au	U1, 8 Hasler Road Osborne Park WA 6017 P: 1800 655 860 M: 0407 912 821 Reception@SmartTechWA.com.au

